



**Caxton®**  
Bathroom Sink  
**K-2211**

**Features**

- Vitreous china.
- Under-mount
- With overflow.
- Includes 1193643 clamp assembly, unless specified.
- Available with KOHLER Artist Editions designs.
- 20-1/4" (540 mm) x 17-1/4" (438 mm)

**Recommended Accessories**

K-8998 P-Trap

**Components**

Additional included component/s: Basin Clamp Assembly .



All fixtures to  
be brushed  
nickel or  
similar

ADA

CSA B651

**Codes/Standards**

ASME A112.19.2/CSA B45.1

ADA

ICC/ANSI A117.1

CSA B651

**KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

**Available Color/Finishes**

*Color tiles intended for reference only.*


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

ESSENCE  
Single-lever basin mixer 1/2"  
L-Size  
MODEL # 32137

Pure Freude an Wasser



GROHE America, Inc | 200 North Gary Avenue, Suite G, Roselle, IL 60172  
Phone: +1 (800) 444-7643 | Fax: +1 (800) 225-2778 | us-customerservice@grohe.com

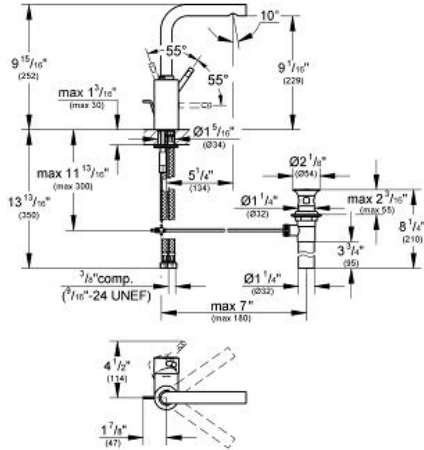

**Product Description:**  
Single-lever basin mixer 1/2"  
L-Size

**Standard Specification:**

- Single hole installation
- **GROHE SilkMove** 35 mm ceramic cartridge
- Adjustable flow rate limiter
- Swivel tubular spout with stop limiter
- Integrated flow control
- Stainless Steel Braided Flexible Supplies
- 1 1/4" pop-up waste set
- Quick installation system
- Lever attachment cover
- Optional temperature limiter ref. no. 46 375
- **GROHE StarLight®** finish
- Max Flow Rate: 1.5 gpm (5.7 L/min)

**Applicable Codes & Standards:**

- Energy Policy Act of 1992
- NSF 61
- ASME A112.18.1/CSA B125.1
- US Federal and State material regulations
- EPA WaterSense®
- ICC/ANSI A117.1

**Color:**

☐ 32137 000 chrome

☒ 32137 EN0 brushed nickel



Buy it for looks. Buy it for life.®

# Specifications

## DESCRIPTION

- Available in various finishes identified by suffix

## OPERATION

- Press down, pump action


## STANDARDS

- Designed and manufactured to comply with the requirements of: CSA B15.1 and ASME A112.18.1 and all requirements referenced therein

## WARRANTY


- Lifetime limited warranty against manufacturing and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

All fixtures to be brushed nickel or similar



## LIQUID DISPENSER

Model: 3942 series

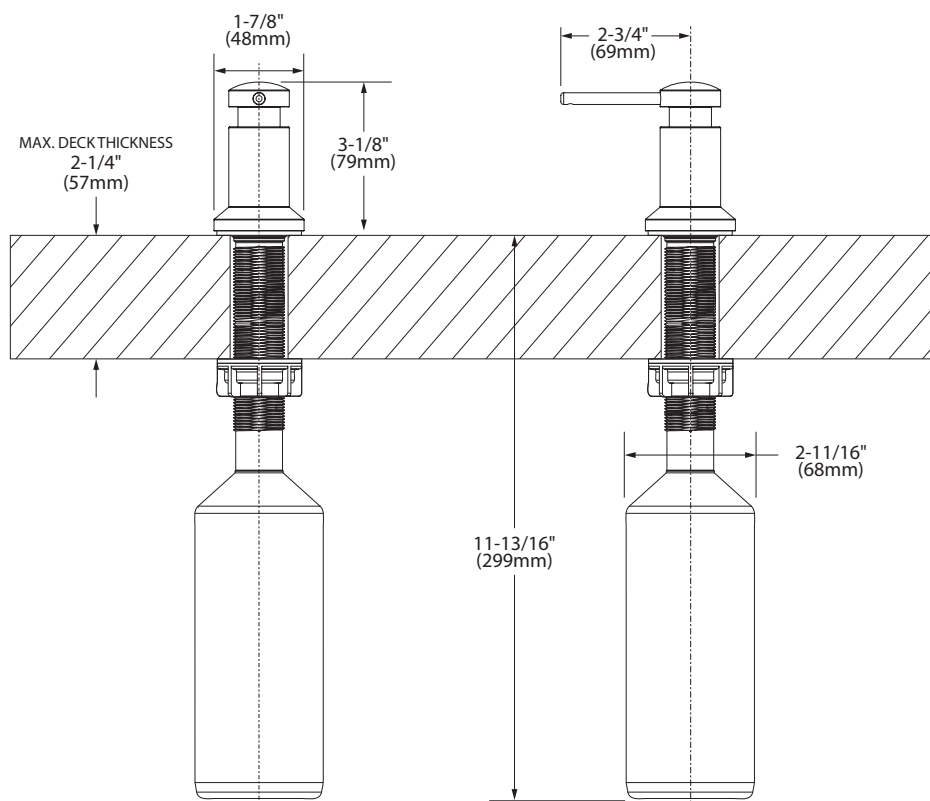

**NOTE:** DESIGNED TO BE INSTALLED THROUGH 1 HOLE 1-1/8" DIAMETER

## CRITICAL DIMENSIONS

(DO NOT SCALE)

### PRODUCT SPECIFICATIONS

Lustertone® Stainless Steel Single Bowl Top Mount Sink + Faucet Kit. Overall dimensions are 22" x 19-1/2" x 5-1/2". Sink is manufactured from 18 gauge 304 Stainless Steel with a Lustrous Highlighted Satin finish, Rear Center drain placement and Full spray sides and bottom.

<b>Installation Type:</b>	Top Mount
<b>Material:</b>	304 Stainless Steel
<b>Finish:</b>	Lustrous Highlighted Satin
<b>Gauge:</b>	18
<b>Sound Deadening:</b>	Full spray sides and bottom
<b>Number of Bowls:</b>	1
<b>Sink Dimensions:</b>	22" x 19-1/2" x 5-1/2"
<b>Bowl 1 Dimensions:</b>	18" x 14" x 5-3/8"
<b>Drain Size:</b>	3-1/2" (89mm)
<b>Drain Location:</b>	Rear Center
<b>Minimum Cabinet Size:</b>	27"
<b>Mounting Hardware:</b>	Part # 64090012 included for countertops up to 3/4" (19mm) thick
<b>Cutout Template #:</b>	<a href="#">1000001255</a>

Template is available for download at [elkay.com](#)


#### Cutout Dimensions for Top Mount Installation:

21-3/8" x 18-7/8" (543mm x 479mm) with 1-1/2" (38mm) corner radius



This sink is compliant to ADA and ANSI/ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

#### Installation Profile:

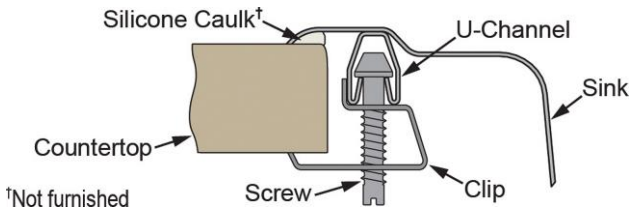

### OPTIONAL ACCESSORIES

<b>Hardware:</b>	LK364, LK463
<b>Sinkmate:</b>	LKSM17, LKSMHOOK, LKSMSPONGE, LKSMHSL



**Included with Product:** LRAD2219552 sink, LK406GN04T4C faucet, LK500 drain

AMERICAN PRIDE. A LIFETIME TRADITION. Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.

**Product Compliance:** ADA  
ASME A112.19.3/CSA B45.4  
Faucet: ASME A112.18.1/CSA B125.1  
NSF 372 (lead free)  
NSF 61  
Accessory: ASME A112.18.2/CSA B125.2

[Clean and Care Manual \(PDF\)](#)  
[Installation Instructions \(PDF\) - 74180147](#)  
[Installation Instructions \(PDF\) - 74210010\\_Drain](#)  
[Installation Instructions \(PDF\) - A55483\\_Faucet](#)  
[Limited Lifetime Warranty \(PDF\)](#)

**Similar models are available with:** additional ADA depths

PART: \_\_\_\_\_ QTY: \_\_\_\_\_

PROJECT: \_\_\_\_\_

CONTACT: \_\_\_\_\_


DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_

APPROVAL: \_\_\_\_\_

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](#) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers

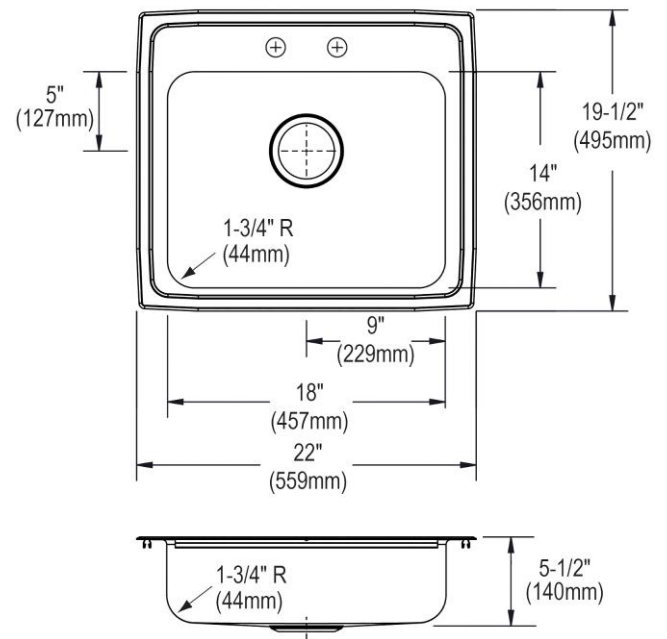

*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](http://elkay.com) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*



Buy it for looks. Buy it for life.®

#### DESCRIPTION

- Chrome plated metal construction
- 1/2" connections: IPS - exterior, CC - interior
- Includes showerhead, arm and flange

#### OPERATION

- Dual control
- Lever handles
- Volume and temperature controlled by rotating handles toward spout to open


#### FLOW

- Showerhead is limited to 2.0 gpm (7.6 L/min) max.

#### CARTRIDGE

- 1224 cartridge design
- Nonmetallic and stainless steel materials

#### STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- ADA  for lever handles
- Meets WaterSense® criteria
- Meets New York City Local Law No. 57


#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

#### Dog Wash

Note- we will need  
(2) of these in the  
dog wash

## Specifications

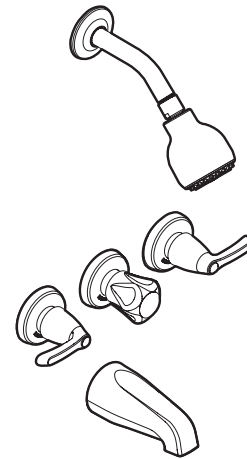


Adler™

Three-Handle Tub/Shower Valve

Model: 82553



Please use this Adler fixture,  
but delete / plug the tub valve,  
and switch out the shower head  
with the Adler handheld shower  
model #23041

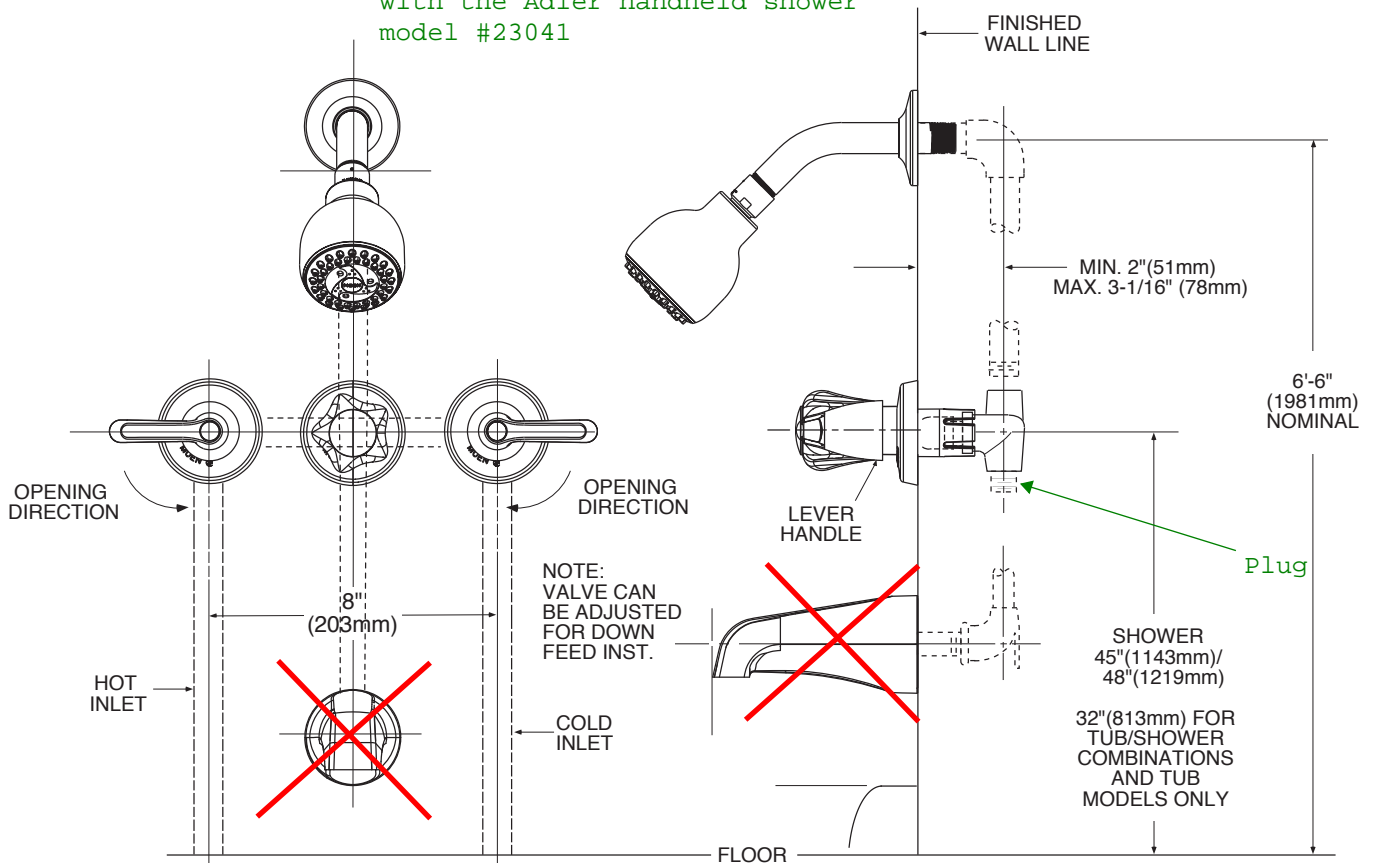

### CRITICAL DIMENSIONS

(DO NOT SCALE)



SOUTHAMPTON™

## Features

- Pedestal designed to conceal water supplies and drain
- Includes mounting hardware
- 5-year limited warranty
- Made of Grade A vitreous china
- Available with 8" (20.3 cm) or 4" (10.2 cm) faucet holes or single hole
- Generous interior basin size and tall 33" (83.8 cm) height
- Unique contemporary design
- Spacious deck
- 23-3/8" (59.4 cm) x 18-1/4" (46.4 cm) x 33" (83.8 cm)

## Codes/Standards Applicable


Specified model meets or exceeds the following:

- ASME A112.19.2/CSA B45.1

## PEDESTAL LAVATORY

# 442428

## ALSO 442424, 442421

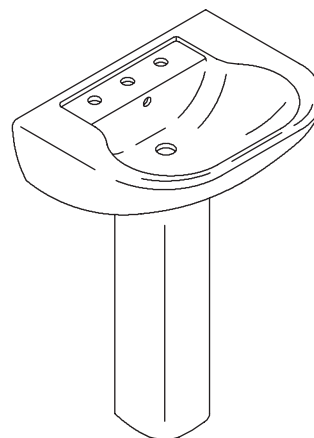

## Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

## Specified Model

Model	Description	Included Pedestal	Included Basin	Colors/Finishes	
442428	8" (20.3 cm) center (faucet)	448420	446428	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
442424	4" (10.2 cm) center (faucet)	448420	446424	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
442421	Single hole	448420	446421	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____


# SOUTHAMPTON™

## Technical Information

Fixture*:	basin area	water depth
Lavatory	20-7/8" (53 cm) x 12-1/4" (31.1 cm)	4" (10.2 cm)
* Approximate measurements for comparison only.		


Holes	442428	442424	442421
Spout	1-3/8" (3.5 cm) D.	1-1/4" (3.2 cm) D.	1-3/8" (3.5 cm) D.
Faucet	1-3/8" (3.5 cm) D.	1-1/4" (3.2 cm) D.	NA
Drain	1-3/4" (4.4 cm) D.	1-3/4" (4.4 cm) D.	1-3/4" (4.4 cm) D.
Drain hole	1-1/4" (3.2 cm) D.	1-1/4" (3.2 cm) D.	1-1/4" (3.2 cm) D.

Included components:	
Pedestal accessory pack	52204
Rubber pads	63069

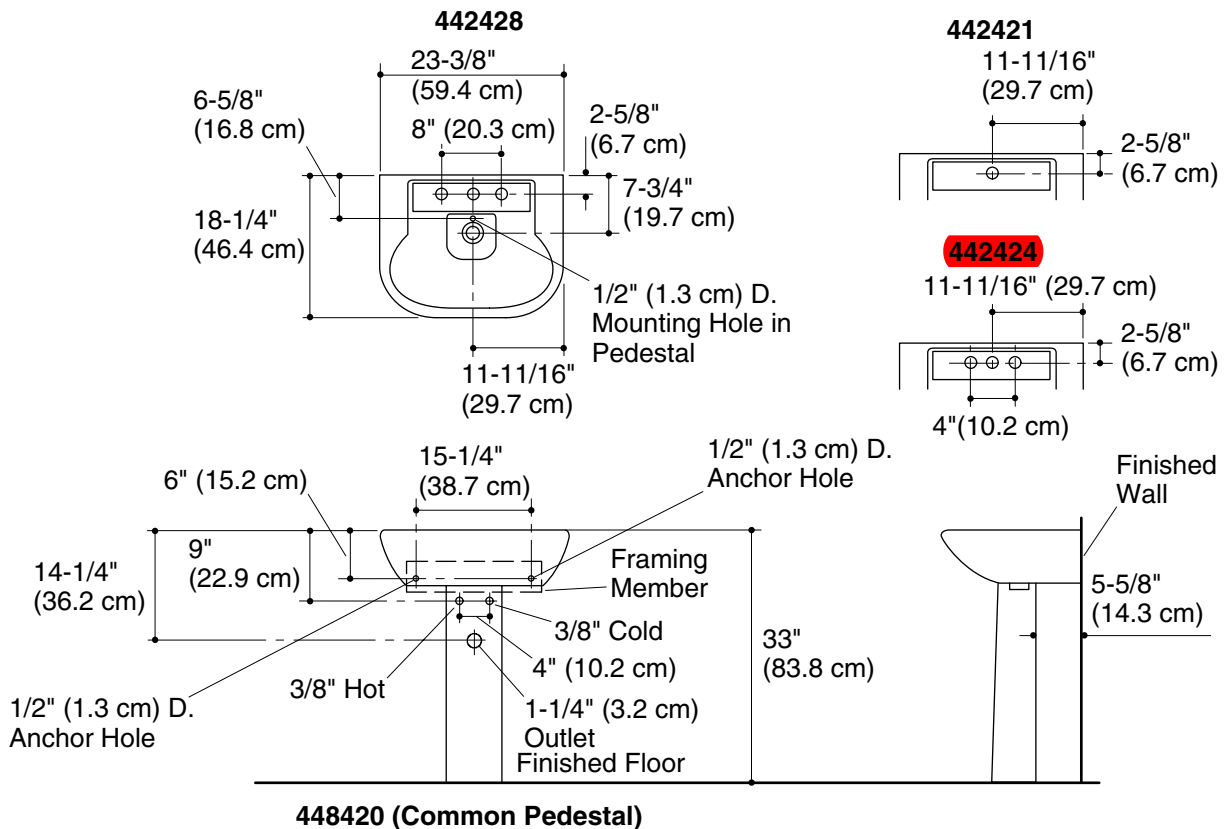

## Product Diagram





3553LF ▲

All fixtures to  
be brushed  
nickel or  
similar

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_



## LAVATORY FAUCETS

- Vero® Bath Collection
- Two Handle Widespread Deck Mount
- 3 Hole Sink Applications
- 6" to 16" Centers

### STANDARD SPECIFICATIONS

- Maximum flow rate 1.5 gpm @ 60 PSI, 5.7 L/min @ 414 kPa.
- Solid brass fabricated end bodies.
- Widespread - 6" (152mm) to 16" (406 mm) centers.
- 4 25/32" (121 mm) long, 6 3/8" (162 mm) high, rigid spout.
- 1/4 turn handle stops
- Hot and cold stems are interchangeable.
- 3/8" O.D. copper supply tubes with 1/2"-14 NPSM adapters.
- Control mechanism is a rotating cylinder type with stainless steel plate and 90°rotating, with replaceable non-metallic seats.
- Models have metal drain with push pop-up type fitting with plated flange and stopper.


### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with 0.25% weighted average Pb content regulations.

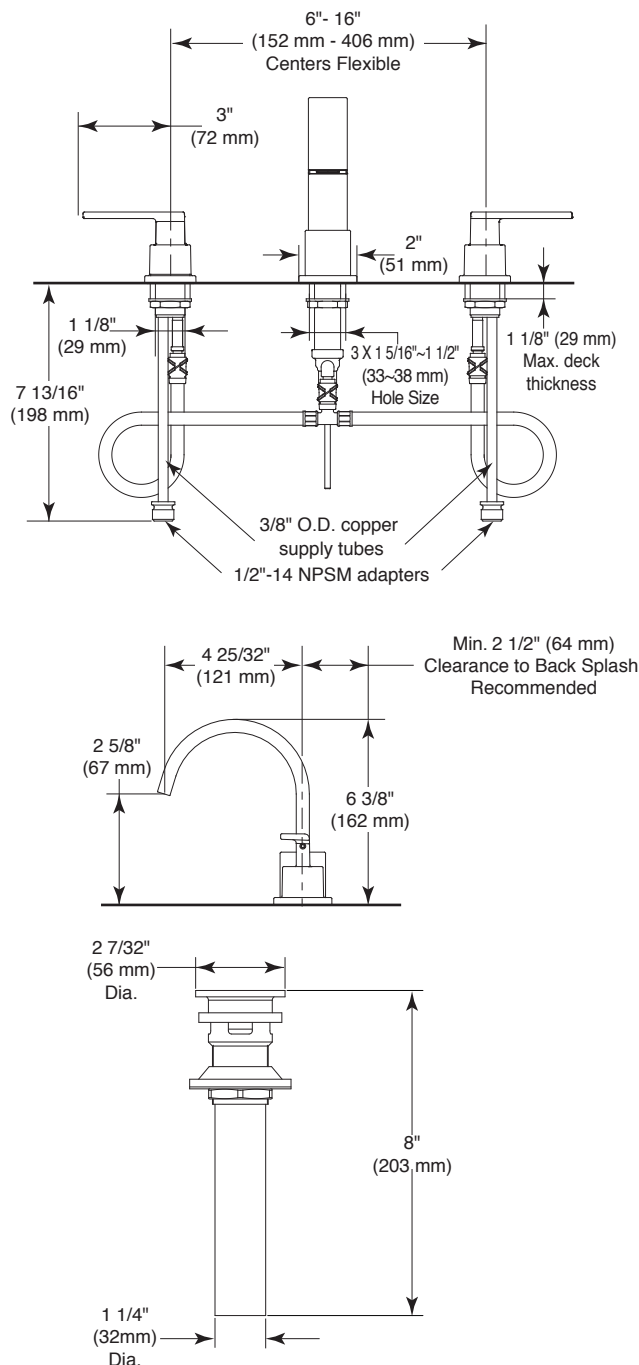

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

DSP-L-3553LF Rev. D



55 E. 111th Street, Indianapolis, Indiana 46280  
350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1  
© 2015 Masco Corporation of Indiana



## **Strive**

### Under-Mount Apron Front Kitchen Sink **K-5417**

#### **Features**

- 30-inch minimum base cabinet width.
- Single bowl.
- 9-inch depth.
- Selt-Trimming apron overlaps the cabinet face for easy installation and beautiful results.
- No faucet holes.
- Rear drain increases workspace in the sink and storage space underneath.
- SilentShield® sound-absorption technology offers quieter performance.
- Includes installation hardware and a bottom basin rack.

#### **Material**

- Handcrafted from 16-gauge stainless steel.

#### **Installation**

- Under-mount apron front.



#### **Codes/Standards**



ASME A112.19.3/CSA B45.4

#### **Lifetime Limited Warranty for KOHLER® Stainless Steel Sinks**


See website for detailed warranty information.

**KOHLER®**

**Strive**  
Under-Mount Apron Front Kitchen Sink  
**K-5417**

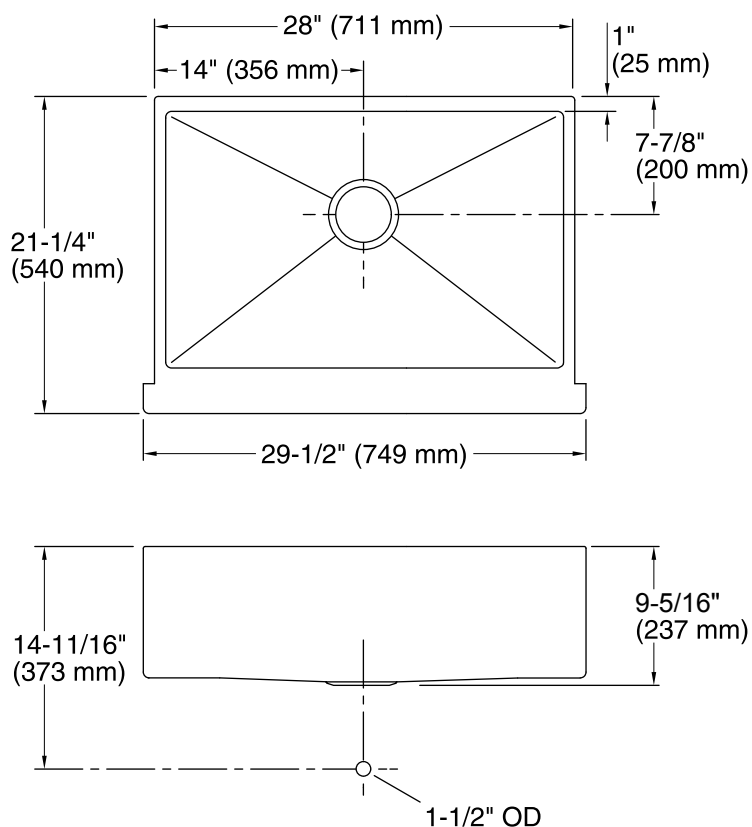

\* Allow clearance on back rim for clip attachment.

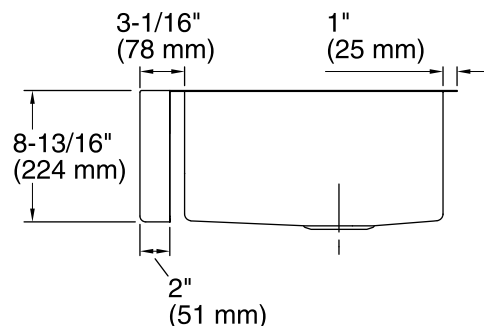

**Technical Information**

All product dimensions are nominal.

Bowl configuration: Single

Installation: Under-mount

Min. base cabinet width: 30" (762 mm)

Bowl area (Center) Length: 26-1/2" (673 mm)  
Width: 17-3/16" (437 mm)  
Bowl depth: 9" (229 mm)  
Water depth: 9" (229 mm)

Template: Apron Front, 1224139-7, required, included

**Notes**

Install this product according to the installation instructions.

Allow a minimum of 3" (76 mm) clearance on the back rim for clip attachment.

The 3/4" (19 mm) side rim flanges are supported without using the clip attachment. See the installation guide for further instructions.



Buy it for looks. Buy it for life.®

Level 22 Outdoor Kitchen

# Specifications

## FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- Quick connect installation
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Faucet designed for handle to be mounted on right side

## OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

## FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

## CARTRIDGE

- 1255™ Duralast™ cartridge

## STANDARDS


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G
- Meets CalGreen and Georgia SB370 requirements
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- **ADA**  for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


All fixtures to be brushed nickel or similar

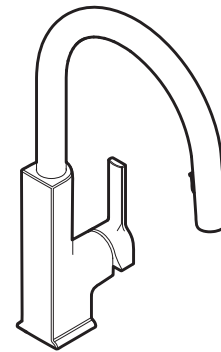

## STō Single Handle High Arc Pulldown Kitchen Faucet

**Models:** S72308 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/2" (38mm) MIN. DIA..

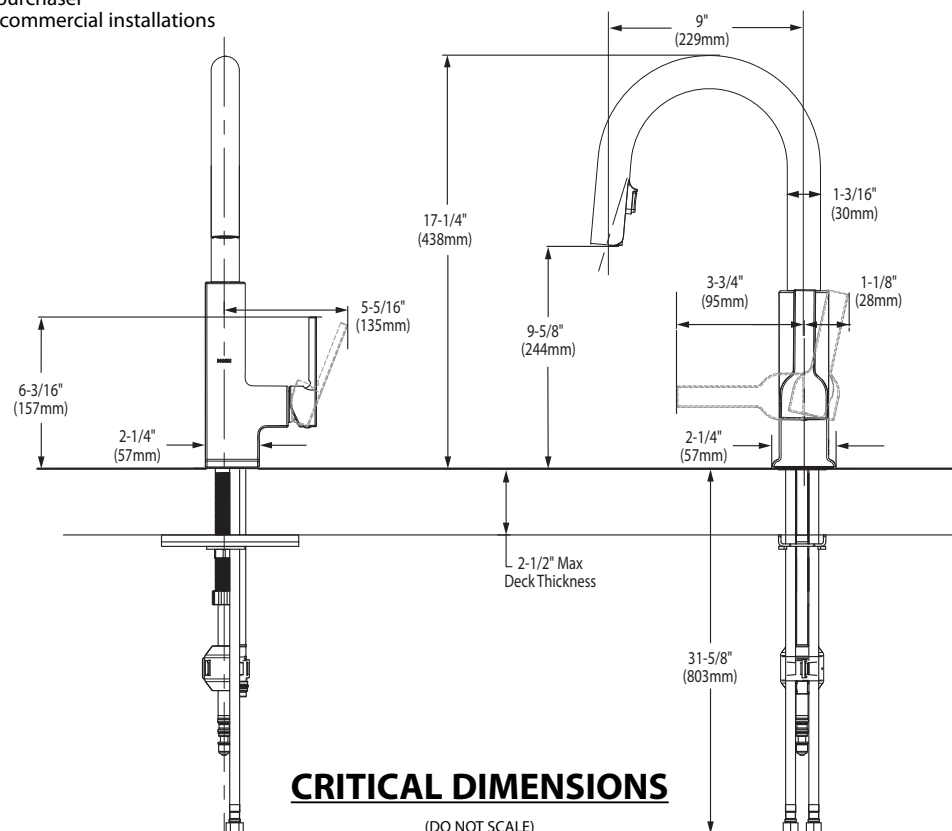

## CRITICAL DIMENSIONS

(DO NOT SCALE)

**FOR MORE INFORMATION CALL: 1-800-BUY-MOEN**

[www.moen.com](http://www.moen.com)

ESSENCE  
Single-lever basin mixer 1/2"  
L-Size  
MODEL # 32137


Level 23 Bathroom

Note - there are 2 unisex bathrooms

*Pure Freude an Wasser*



GROHE America, Inc | 200 North Gary Avenue, Suite G, Roselle, IL 60172  
Phone: +1 (800) 444-7643 | Fax: +1 (800) 225-2778 | us-customerservice@grohe.com

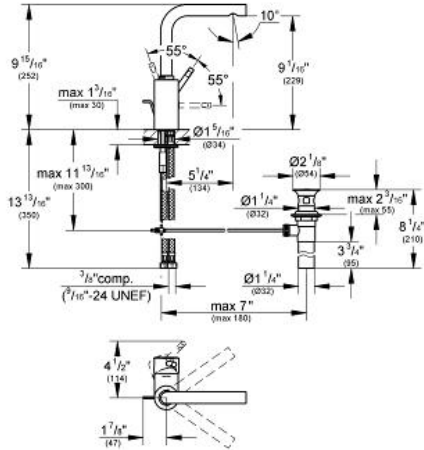

**Product Description:**  
Single-lever basin mixer 1/2"  
L-Size

**Standard Specification:**

- Single hole installation
- **GROHE SilkMove** 35 mm ceramic cartridge
- Adjustable flow rate limiter
- Swivel tubular spout with stop limiter
- Integrated flow control
- Stainless Steel Braided Flexible Supplies
- 1 1/4" pop-up waste set
- Quick installation system
- Lever attachment cover
- Optional temperature limiter ref. no. 46 375
- **GROHE StarLight®** finish
- Max Flow Rate: 1.5 gpm (5.7 L/min)

**Applicable Codes & Standards:**

- Energy Policy Act of 1992
- NSF 61
- ASME A112.18.1/CSA B125.1
- US Federal and State material regulations
- EPA WaterSense®
- ICC/ANSI A117.1

**Color:**

- ☐ 32137 000 chrome
- ☒ 32137 EN0 brushed nickel



Note - there are 2 unisex bathrooms

**Caxton®**  
Bathroom Sink  
**K-2211**

**Features**

- Vitreous china.
- Under-mount
- With overflow.
- Includes 1193643 clamp assembly, unless specified.
- Available with KOHLER Artist Editions designs.
- 20-1/4" (540 mm) x 17-1/4" (438 mm)

**Recommended Accessories**

K-8998 P-Trap

**Components**

Additional included component/s: Basin Clamp Assembly .



**ADA** **CSA B651**

**Codes/Standards**











ASME A112.19.2/CSA B45.1  
ADA  
ICC/ANSI A117.1  
CSA B651

**KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

**Available Color/Finishes**






*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™



Note - there are 2 unisex bathrooms

**Caxton®**  
Bathroom Sink  
**K-2211**

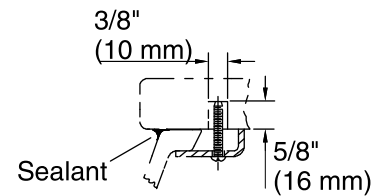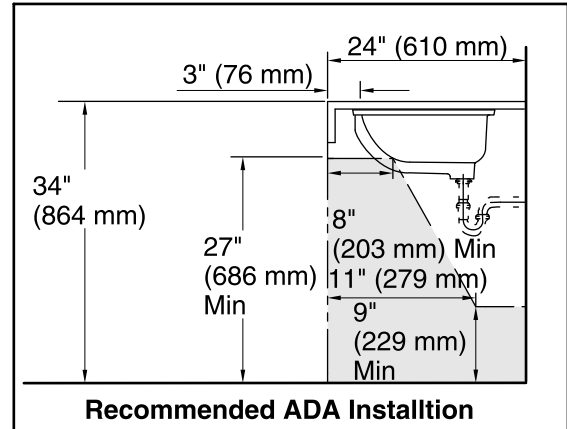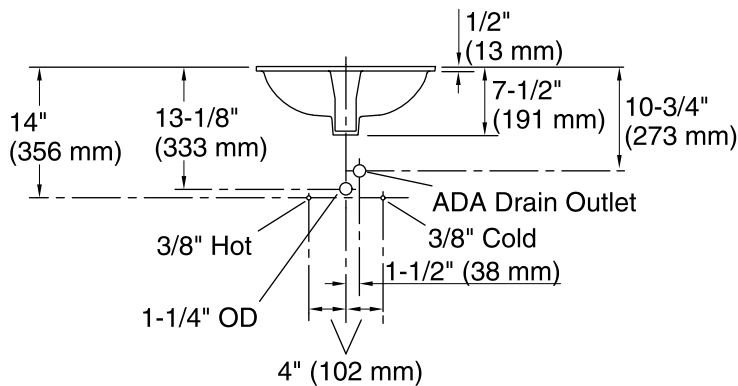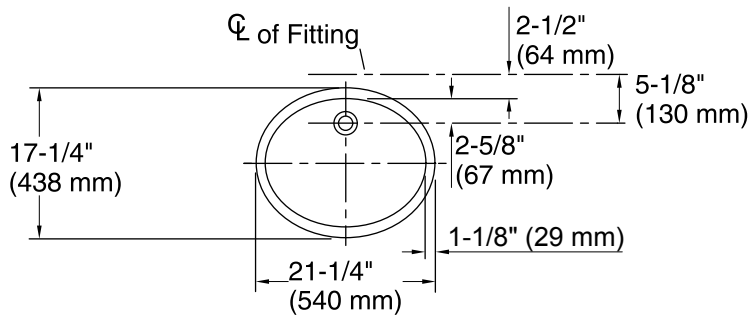

**Technical Information**

All product dimensions are nominal.

Installation:	Under-mount
Bowl area	Length: 19" (483 mm) Width: 15" (381 mm) Water depth: 4" (102 mm)
Drain hole:	1-3/4" (44 mm)
Template:	Under-mount, 1018997-7, required, not included

**Notes**

Install this product according to the installation instructions.

NOTICE: Countertop manufacturer or cutter must use the current product template available at [www.kohler.com](http://www.kohler.com), or by calling 1-800-4KOHLER. Kohler Co. is not responsible for cutout errors when the incorrect cutout template is used.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

## PRODUCT SPECIFICATIONS

(Lustertone®) Stainless Steel Single Bowl Undermount Sink. Overall dimensions are 21-1/2" x 18-1/2" x 5-3/8". Sink is manufactured from 18 gauge 304 Stainless Steel with a Lustrous Highlighted Satin finish, Rear Center drain placement, Full spray sides and bottom and Bottom Only sound dampening pads.


<b>Installation Type:</b>	Undermount
<b>Material:</b>	304 Stainless Steel
<b>Finish:</b>	Lustrous Highlighted Satin
<b>Gauge:</b>	18
<b>Sound Deadening:</b>	Full spray sides and bottom
<b>Sound Dampening Pads:</b>	Bottom Only
<b>Number of Bowls:</b>	1
<b>Sink Dimensions:</b>	21-1/2" x 18-1/2" x 5-3/8"
<b>Bowl 1 Dimensions:</b>	19" x 16" x 5-3/8"
<b>Drain Size:</b>	3-1/2" (89mm)
<b>Drain Location:</b>	Rear Center
<b>Minimum Cabinet Size:</b>	27"
<b>Mounting Hardware:</b>	Undermount brackets sold separately
<b>Template Included:</b>	Yes
<b>Cutout Template #:</b>	<a href="#">1000001424</a>

Template is available for download at [elkay.com](#)



This sink is compliant to ADA and ANSI/ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

### Installation Profile:

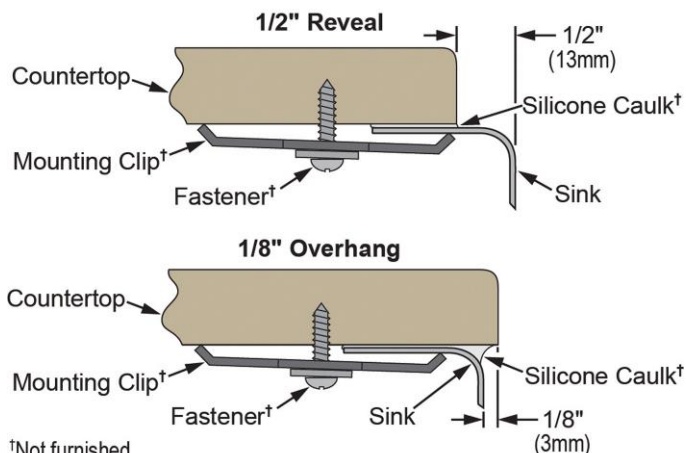

†Not furnished

Designed to affix to the underside of any solid surface countertop.



### AMERICAN PRIDE. A LIFETIME TRADITION.

Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.



Sinks are listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.


**Product Compliance:** ADA  
BUY AMERICAN ACT  
ASME A112.19.3/CSA B45.4

[Clean and Care Manual \(PDF\)](#)

[Installation Instructions \(PDF\)](#)

[Limited Lifetime Warranty \(PDF\)](#)

**Similar models are available with:** additional ADA depths

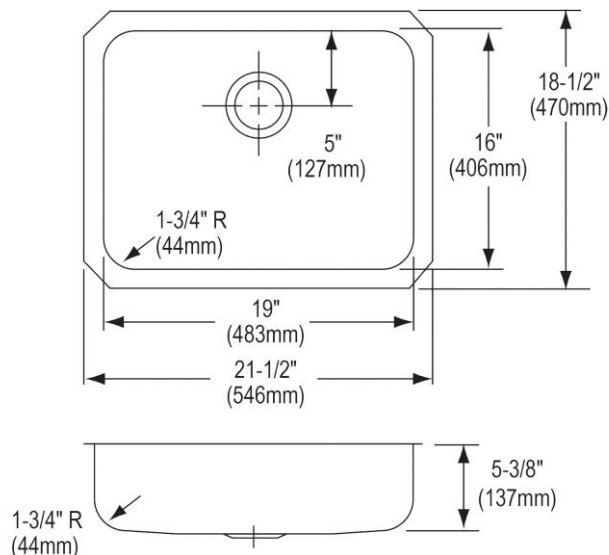

PART: \_\_\_\_\_ QTY: \_\_\_\_\_

PROJECT: \_\_\_\_\_

CONTACT: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_

APPROVAL: \_\_\_\_\_

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](#) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



**OPTIONAL ACCESSORIES**

<b>Cutting Board:</b>	CB713*, CBS1316*
<b>Drain:</b>	LK99, LKAD35
<b>Faucet:</b>	LKGT1041, LKGT2041
<b>Hardware:</b>	LKUCLIP8
<b>Rinsing Basket:</b>	LKWRB1418SS, LKWERBSS
<b>Sinkmate:</b>	LKSM17, LKSMHOOK, LKSMSPONGE, LKSMHSL
<b>Soap Dispenser:</b>	LKGT1054
* 1/2" sink reveal required for proper fit.	

*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](http://elkay.com) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*



Buy it for looks. Buy it for life.®

# Specifications

**FAUCET DESCRIPTION**

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- Quick connect installation
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Faucet designed for handle to be mounted on right side

**OPERATION**

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

**FLOW**

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

**CARTRIDGE**

- 1255™ Duralast™ cartridge

**STANDARDS**


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G
- Meets CalGreen and Georgia SB370 requirements
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- **ADA**  for lever handle

**WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


All fixtures to  
be brushed  
nickel or  
similar

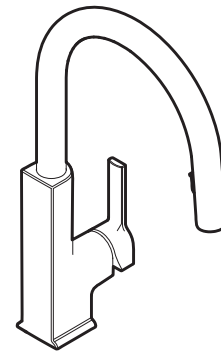

**STō**  
**Single Handle High Arc**  
**Pulldown Kitchen Faucet**

**Models:** S72308 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED  
THRU 1 HOLE, 1-1/2" (38mm) MIN. DIA..

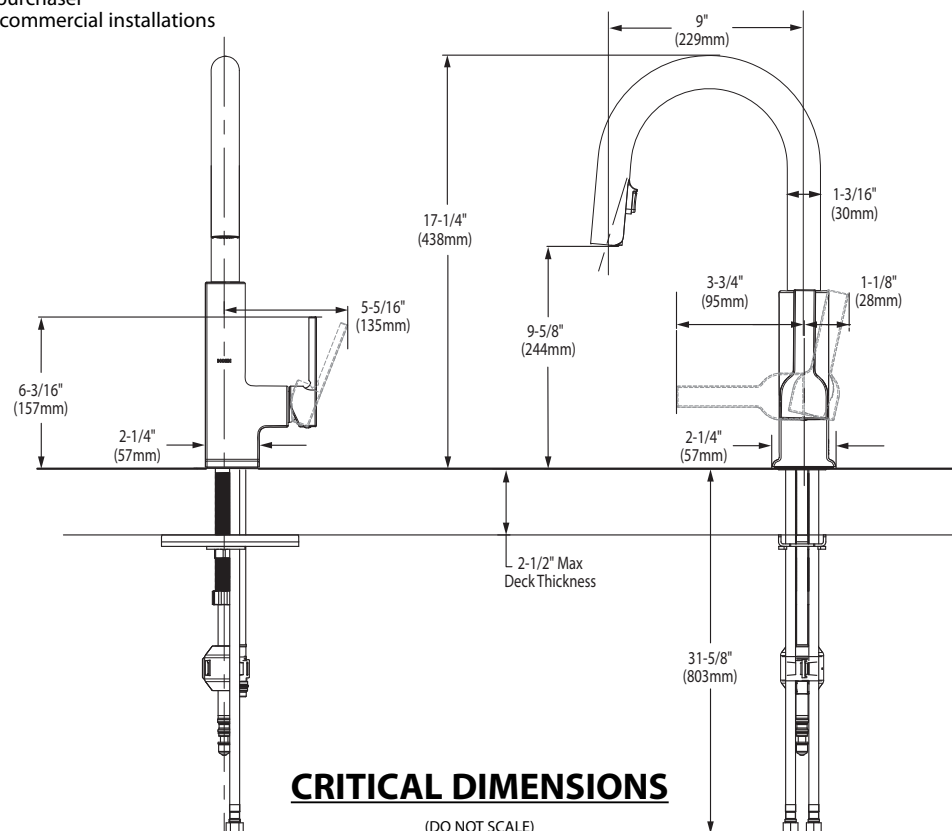

**FOR MORE INFORMATION CALL: 1-800-BUY-MOEN**


**www.moen.com**

**VIPER™ 1.28  
ErgoHeight™  
Compact Elongated Toilet**

12" Rough-in



**Features:**

- 1.28 gpf/4.8 Lpf high efficiency two-piece toilet
- Elongated ErgoHeight™ bowl
- Compact design fits in round front space
- Dual-fed siphon jet
- Fluidmaster® fill valve
- 3" flush valve
- 2" glazed trapway
- Color matched tank lever
- Available in White and Biscuit
- 2 bolt caps
- ADA Compliant

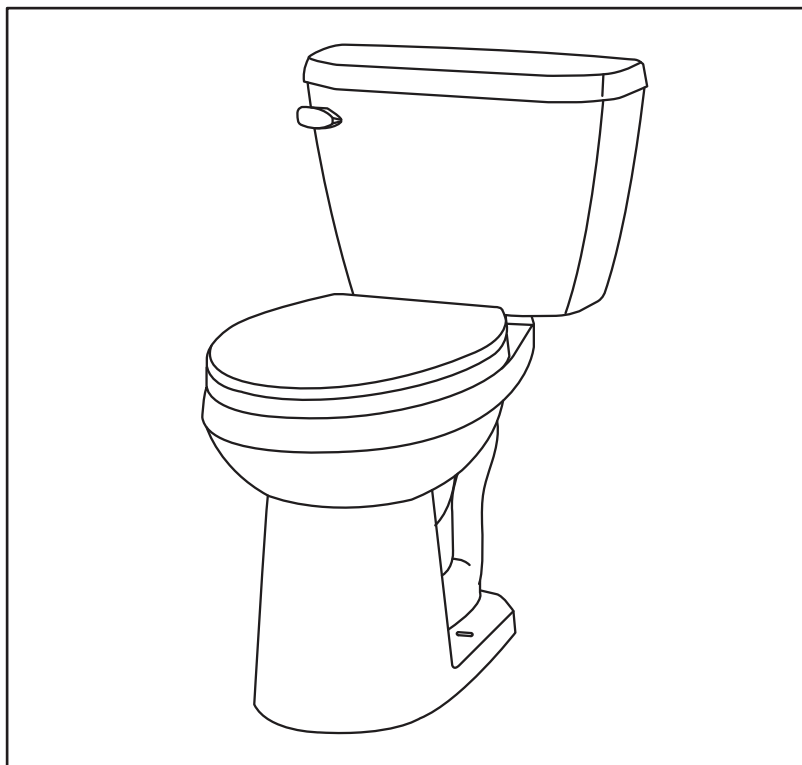**Dimensions:**

Height ..... 29<sup>7</sup>/<sub>8</sub>"  
 Width ..... 18<sup>3</sup>/<sub>8</sub>"  
 Depth ..... 26<sup>7</sup>/<sub>8</sub>"  
 Rough-in ..... 12"  
 Water Surface from Rim ..... 6<sup>1</sup>/<sub>8</sub>"  
 Trapway (ave)\* ..... 2"  
 Water Surface ..... 9<sup>7</sup>/<sub>8</sub>" x 6<sup>7</sup>/<sub>8</sub>"  
 Water Seal ..... 2"  
 Shipping Weight ..... 77 lbs

**Specifications:** Bowl—#HE-21-872 Elongated Bowl Tank—#HE-28-570  
 Seat not included

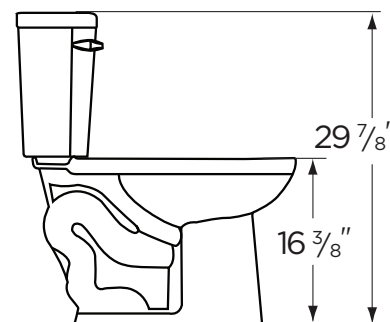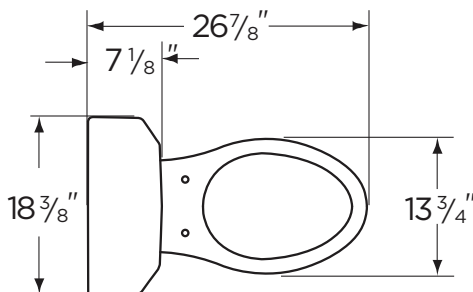

THIS FIXTURE QUALIFIES  
 ACCORDING TO ASME TEST  
 PROCEDURES AS A HIGH  
 EFFICIENCY WATER CLOSET WITH  
 AN AVERAGE CONSUMPTION OF  
 1.28 gpf (4.8 Lpf) OR LESS.

HIGH EFFICIENCY TOILET  
**HET**


[www.gerberonline.com](http://www.gerberonline.com)

Job Name	
Date	
Model Specified	
Quantity	
Customer	
Contractor	
Architect/engineer	

